

APX NEXT

PROTECT YOUR FOCUS

IN PUBLIC SAFETY, FOCUS IS YOUR GREATEST RESOURCE. MAKE SURE IT'S PROTECTED WITH APX NEXT™.

A MASSIVE ADVANCE IN MISSION-CRITICAL VOICE AND DATA

Your radio is your lifeline. APX NEXT is our next step in advancing it. It's designed to military standards for extreme ruggedness. The touchscreen works with or without gloves—in rain, dirt, and dust. Digital mics and high-power speakers deliver our best audio ever, while SmartConnect keeps you connected even beyond your P25 system. The result is a radio that works when you need it, without pause, distraction or doubt.

EFFORTLESS IS ALWAYS IN REACH

APX NEXT is designed for effortless usability when everything is on the line. Intuitive knobs and buttons are easily distinguished by touch. A mission-critical touchscreen makes it fast and easy to operate your radio. ViQi understands a huge range of natural language voice commands, so you can operate the radio with eyes-up awareness. Every interaction is simple, fast and logical. You stay focused on what matters—your mission and your safety.

BRING NEW INTELLIGENCE TO THE POINT OF ENGAGEMENT

APX NEXT mission-critical apps bring new intelligence to the field. ViQi enables natural language database queries, rapidly giving vital information, and letting dispatchers stay focused on critical situations. And as part of our unique, end-to-end public safety ecosystem, APX NEXT data and operations are secure, and new capabilities can be seamlessly added as your needs evolve.

UPDATE YOUR FLEET IN MINUTES, NOT MONTHS

APX NEXT gives you back time: a cloud-based provisioning system prepares radios before they arrive. Remote updating keeps radios in the field, with zero touch and zero downtime. MyView Portal provides direct access to subscriptions, warranties and licenses, and a range of services helps you manage your operation. With APX NEXT, your ownership experience is streamlined, so your valuable resources stay focused and ready.



MISSION-CRITICAL DESIGN

New antenna technology improves comfort and wearability

Large color top screen, for glanceable status updates

Intuitive hard controls, protected against accidental activation

Mission-critical touchscreen: rugged, usable with gloves, readable in all lighting conditions

Digital microphones, for outstanding audio capture

Large, distinctive buttons for PTT, emergency and ViQi, and two additional programmable side buttons

Standard 3850 mAh battery, with 5650 mAh high capacity option



FEATURES

OPERATION MODES

Digital Trunking: 9600 Baud APCO P25 Phase 1 FDMA and Phase 2 TDMA

Digital Conventional: APCO 25

Analog Trunking: 3600 Baud SmartNet®, SmartZone®, Omnilink®

Analog Conventional: MDC 1200

ASTRO® 25 Integrated Voice and Data

SmartConnect Multi-net Connectivity*

FREQUENCY BANDS

All-band: Simultaneous Operation in VHF, UHF Range 1, UHF Range 2, 700 and 800 MHz Bands

Up to 3000 Channels

Up to 125 Zones

ADDITIONAL CONNECTIVITY

Bluetooth (Version 5.0)

WiFi (802.11a/b/g/n/ac), 2.4 and 5 GHz Bands

LTE (FirstNet® Ready)

NFC (Near-Field Communications)**

AUDIO FEATURES

3 W Speaker with Adaptive Equalization

2 Internal Digital Microphones

Adaptive Dual-sided Operation

Adaptive Noise Suppression Intensity

Adaptive Gain Control

Adaptive Windporting

IMPRES™ Audio Accessory Compatibility

MANAGEMENT

RadioCentral™

SmartProgramming™

LOCATION-TRACKING

Built-in GNSS (GPS and GLONASS)

SmartLocate*

Mission-critical Geofence**

SECURITY

256-bit AES*

Single-key ADP Encryption

Software Key

P25 Authentication*

Multikey for 128 Keys and Multi-algorithm*

Over-The-Air Rekeying (OTAR)*

INGRESS PROTECTION

IP6x Dust

IPx8 Submersion (2 m, 4 hr)

MIL-STD Delta-T, 512.X Procedure 1

MESSAGING

Text Messaging

Freeform or Canned Messages

USER INTERFACE

3.6" Mission-critical Touchscreen: 800x480 TFT 24-bit Full Color Transflective Display, 1 mm Toughened Glass Lens

Capacitive Touch Technology: Usable with Gloves

Up to 4 mm Thick, Resistant to False Actuation from Fresh or Salt Water, Snow, Ice, Dirt or Grease

High Velocity User Interface: Large Touch Targets, Shallow Menu Hierarchy, Home Screen Information at a Glance, Integrated Applications

1.2" Top Display: 200x112 TFT 18-bit Color Transflective Screen, 1 Line of Icons, 2 Lines of Text, 14 Characters per Line, 2 mm Toughened Glass Lens

PTT Button: 1.32 x 0.54 in (33.5 x 13.8 mm)

16-position Channel Selector

Angled Power/Volume Knob

Large Orange Emergency Button

3 Programmable Side Buttons (1-dot, 2-dot, purple)

Concentric 2-position Switch

ABC Zone Switch

ViQi Button (3-dot)

Display On/Off/Home Button

ViQi VOICE INTERACTION

Customizable Voice Announcements

Voice Control: 13 Actions, 76 Commands*

Virtual Partner Service*

ENERGY

Standard 3850 mAh Battery

Optional High Capacity 5650 mAh Battery*

IMPRES 2 Smart Battery Technology

SENSORS

Ambient Light

Accelerometer x2 (Display Orientation, Man Down)

Magnetometer (eCompass)

OTHER FEATURES

Radio Profiles

Enhanced Data*

Multicast Voting Scan*

Man Down**

DIMENSIONS

Radio with Standard Battery, no Antenna

Height: 5.4 in (138 mm)

Width: 2.5 in (63 mm)

Depth: 1.7 in (43 mm)

Weight: 18.5 oz (525 g)

Radio with High Capacity Battery, no Antenna

Height: 7.1 in (180 mm)

Width: 2.5 in (63 mm)

Depth: 1.7 in (43 mm)

Weight: 22.8 oz (647 g)

6.3 in
(161 mm)

5.4 in
(138 mm)

3.2 in
(80 mm)

1.7 in
(43 mm)

2.5 in
(63 mm)



PERFORMANCE

TRANSMITTER

	Footnote	VHF	UHF Range 1	UHF Range 2	700 MHz	800 MHz
Frequency Range / Bandsplits	-	136-174 MHz	380-470 MHz	450-520 MHz	762-776, 792-806 MHz	806-825, 851-870 MHz
Channel Spacing	1	12.5 / 20 / 25 kHz	12.5 / 20 / 25 kHz			
Maximum Frequency Separation	-	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit
Rated RF Output Power (Adjustable)	2	1-6 W	1-5 W	1-5 W	1-2.5 W	1-3 W
Frequency Stability (-30 °C to +60 °C; +25 °C Ref.)	2	±1.0 ppm	±1.0 ppm	±1.0 ppm	±1.0 ppm	±1.0 ppm
Modulation Limiting (12.5 / 20 / 25 kHz Channel)	2	±2.5 / ±4 / ±5 kHz	±2.5 / ±4 / ±5 kHz			
Emissions (Conducted and Radiated)	2	-75 dBc	-75 dBc	-75 dBc	-75 dBc	-75 dBc
Audio Response	2	+1, -3 dB	+1, -3 dB	+1, -3 dB	+1, -3 dB	+1, -3 dB
FM Hum and Noise (12.5 / 25 kHz Channel)	2	-53 / -55 dB	-52 / -54 dB	-51 / -54 dB	-50 / -55 dB	-49 / -53 dB
Audio Distortion (12.5 / 25 kHz Channel)	2	0.75% / 0.75%	0.75% / 0.75%	0.75% / 0.75%	0.85% / 0.85%	0.85% / 0.85%

RECEIVER

	Footnote	VHF	UHF Range 1	UHF Range 2	700 MHz	800 MHz
Frequency Range / Bandsplits	-	136-174 MHz	380-470 MHz	450-520 MHz	762-776, 799-806 MHz	851-870 MHz
Channel Spacing	1	12.5 / 20 / 25 kHz				
Maximum Frequency Separation	-	Full Bandsplit				
Frequency Stability (-30 °C to +60 °C; +25 °C Ref.)	2	±1.0 ppm				
Analog Sensitivity (12 dB SINAD)	2	0.178 µV (-122.0 dBm)	0.211 µV (-120.5 dBm)	0.211 µV (-120.5 dBm)	0.224 µV (-120.0 dBm)	0.237 µV (-119.5 dBm)
Digital Sensitivity (1% BER)	3	0.266 µV (-118.5 dBm)	0.298 µV (-117.5 dBm)	0.298 µV (-117.5 dBm)	0.335 µV (-116.5 dBm)	0.335 µV (-116.5 dBm)
Digital Sensitivity (5% BER)	3	0.158 µV (-123.0 dBm)	0.178 µV (-122.0 dBm)	0.178 µV (-122.0 dBm)	0.224 µV (-120.0 dBm)	0.224 µV (-120.0 dBm)
Selectivity (12.5 / 25 kHz Channel)	2	77 / 84 dB	74 / 81 dB	74 / 81 dB	72 / 80 dB	72 / 79 dB
Intermodulation Rejection	2	82 dB	80 dB	80 dB	80 dB	80 dB
Spurious Rejection	2	98 dB	95 dB	95 dB	98 dB	98 dB
FM Hum and Noise (12.5 / 25 kHz Channel)	2	55 / 59 dB	54 / 58 dB	54 / 58 dB	53 / 57 dB	52 / 56 dB
Audio Distortion	2	0.90%	0.90%	0.90%	0.90%	0.90%



IMPRES™ 2 BATTERIES

	Footnote	Part No	Capacity	Availability
Standard	-	NNTN9087	3850 mAh	Included
High Capacity	-	NNTN9089	5650 mAh	Optional
Standard HazLoc	4	NNTN9088	3850 mAh	Optional
High Capacity HazLoc	4	NNTN9090	5650 mAh	Optional

ENCRYPTION

Supported Encryption Algorithms	ADP, AES, DES, DES-XL, DES-OFB, DVP-XL, Localized Algorithm
Encryption Algorithm Capacity	8
Encryption Keys per Radio	1024 Keys, Programmable for 128 Common Key References (CKR) or 16 Physical Identifiers (PID)
Encryption Keying	Local Key Loader and Over-the-Air Rekeying (OTAR)
Synchronization	XL - Counter Addressing OFB - Output Feedback
Vector Generator	NIST-Approved Random Number Generator
Encryption Type	Digital and SecureNet, TLS1.2, SRTP
Key Storage	Tamper-protected Volatile or Non-volatile Memory
Key Erasure	Keyboard Command and Tamper Detection
Standards	FIPS 140-2 Level 1 and Level 3, FIPS 197
Device Certificates	x.509v3 ECC-P384, x.509v3 RSA-2048
Cipher Suites	ECDHE_ECDSA_WITH_AES256_GCM_SHA384 TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA TLS_RSA_WITH_AES_256_GCM_SHA384 SRTP_AEAD_AES_256_GCM1

COLOR

Standard Color	Black/Gray
Optional Side Panel Colors (Supplied as Retro-fit Kits)	Red, Blue, Orange, Public Safety Yellow, High Impact Green, Coyote Brown

WIRELESS

LTE	
Bands Supported	2, 4, 12, 14
Bands (Hardware Ready)	5, 13, 17
Device Class	4
Certifications	FirstNet

WiFi	
Standards Supported	802.11a/b/g/n/ac
Frequency Range	2400-2472, 5180-5825 MHz
Security	Supports WPA-2, WPA, WEP
Capacity	Up to 20 SSIDs

Bluetooth	
Version	5.0
Frequency Range	2402 - 2480 MHz
Security	128-bit AES-CCM Encryption

AUDIO

Audio Output Power at Rated	3 W
Audio Output Power at Max	5 W
Audio Response (EIA)	+1, -3 dB
Speech Loudness at 12 in (300 mm)	105 Phn

Audio Features	Adaptive Equalization Adaptive Dual-sided Operation Adaptive Noise Suppression Intensity Adaptive Gain Control Adaptive Windporting IMPRES Audio
----------------	---

LOCATION-TRACKING

	Footnote	
Constellations	-	GNSS (GPS and GLONASS)
Tracking Sensitivity	-	-159 dBm
Accuracy	5	<5m (95%)
Cold Start	5	<60 Seconds (95%)
Hot Start	5	<5 Seconds (95%)
Mode	-	Autonomous (Assisted only with LTE service)

ENVIRONMENTAL AND REGULATORY

MIL-STD 810

	MIL-STD 810C		MIL-STD 810D		MIL-STD 810E		MIL-STD 810F		MIL-STD 810G/H	
	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.
Low Pressure	500.1	I	500.2	II	500.3	II	500.4	II	500.5	II
High Temperature	501.1	I, II	501.2	I/A1, II/A1	501.3	I/A1, II/A1	501.4	I/Hot, II/Hot	501.5	I/A1, II/A1
Low Temperature	502.1	I	502.2	I/C3, II/C1	502.3	I/C3, II/C1	502.4	I/C3, II/C1	502.5	I/C3, II/C1
Temperature Shock	503.1	I	503.2	I/A1, C3	503.3	I/A1, C3	503.4	I	503.5	I/C
Solar Radiation	505.1	II	505.2	I	505.3	I	505.4	I	505.5	I/A1
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, III	506.5	I, III
Humidity	507.1	II	507.2	II	507.3	II	507.4	1 Proc	507.5	II/Aggravated
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	1 Proc	509.5	1 Proc
Blowing Dust	510.1	I	510.2	I	510.3	I	510.4	I	510.5	I
Blowing Sand	1 Proc	1 Proc	510.2	II	510.3	II	510.4	II	510.5	II
Submersion	512.1	I	512.2	I	512.3	I	512.4	I	512.5	I
Vibration	514.2	VIII/F, Curve-W	514.3	I/10, II/3	514.4	I/10, II/3	514.5	I/24	514.6	I/24
Shock	516.2	I, III, V	516.3	I, V, VI	516.4	I, V, VI	516.5	I, V, VI	516.6	I, V, VI
Shock (Drop)	516.2	II	516.3	IV	516.4	IV	516.5	IV	516.6	IV

ENVIRONMENTAL

	Footnote	
Operating Temperature	6	-30 to +60 °C (-22 to +140 °F)
Storage Temperature	6	-40 to +85 °C (-40 to +185 °F)
Humidity	-	Per MIL-STD 810
ESD	-	IEC 801 - 2 kV
Dust Resistance	-	IP6X
Water Resistance (Submersion)	-	IPX8 (2 meters, 4 hours) MIL-STD Delta-T, 512.X Procedure 1

REGULATORY

FCC ID	AZ489FT7119
IC ID	109U-89FT7119
LMR	8K10F1D, 8K10F1E, 8K10F1W, 11K0F3E, 16K0F3E, 20K0F1E
Bluetooth	1M18G1D, 1M1F1D, 2M1F1D
WiFi	12M9G1D, 16M7D1D, 17M9D1D, 36M2D1D, 17M5D1D, 18M4D1D, 36M8D1D, 76M1D1D
LTE	Band 2 (1850.7 - 1900 MHz), Modulation: *G7D, *D7W Band 4 (1710.7 - 1745 MHz), Modulation: *G7D, *D7W Band 12 (699.7 - 711 MHz), Modulation: *G7D, *D7W Band 14 (790.5 - 793 MHz), Modulation: *G7D, *D7W
OM Model Number	H55TGT9PW8AN

FOOTNOTES:

1. Please refer to local regulations for available channel bandwidths.
2. Measured conductively in analog mode per TIA / EIA 603 under nominal conditions, and at 1 W Rated Audio for Rx. Selectivity measured using the TIA-603 single-tone method.
3. Measured conductively in digital mode per TIA / EIA IS 102.
4. Listed by UL to non-incendive standards: UL 121201 and CAN/CSA C22.2 No. 213-17 as safe for use in Class I, Division 2, Groups A,B,C,D; Class II, Division 2, Groups F,G; Class III Hazardous Locations.
5. Measured conductively with >6 satellites visible at a nominal -130 dBm signal strength. Specs provided are 95th percentile values.
6. LMR only. Front display, LTE, WiFi, Bluetooth and GPS not available when radio internal temperature is below -20 °C (-4 °F). Hi-capacity battery required for operation between -20 °C (-4 °F) and -30 °C (-22 °F). Batteries should be charged at 0 to +45 °C (+32 to +113 °F) and stored at +20 to +25 °C (+68 to +77 °F). Reference motorolasolutions.com/batterycare

All specifications are subject to change without notice. For full details consult product service manual, document no. MN005643A01.





ACCESSORIES

EXPAND AND CUSTOMIZE YOUR RADIO'S FUNCTIONALITY WITH BEST-IN-CLASS ACCESSORIES.

AUDIO

HEAR AND BE HEARD LIKE NEVER BEFORE

XV Remote Speaker Microphone

PMMN4123

- Loudest, clearest speaker
- Four digital microphones
- Enhanced windporting
- New adaptive noise suppression
- Dedicated ViQi button

ANTENNAS

DESIGNED FOR WEARABILITY



7/800MHz Stubby Antenna 65 mm (760-870 MHz)

AN000296A01



Whip All-band Antenna 200 mm (V,U,7/800MHz)

AN000297A01

Colored antenna ID bands are available for easy customization and come in packs of 10.

- 32012144001 Gray
- 32012144002 Yellow
- 32012144003 Green
- 32012144004 Blue
- 32012144005 Purple

CARRY

SECURE, EASY ACCESS



Classic Holster

PMLN7947



Hybrid Leather Carry Case

PMLN7948
Standard Capacity
PMLN7964
High Capacity

ENERGY

MAXIMIZED POWER, LIFE AND MANAGEMENT



IMPRES 2 Multi-Unit Charger

NNTN9115



IMPRES 2 Single-Unit Charger

NNTN9199



IMPRES 2 Standard Capacity Battery

NNTN9087
3850mAh

NNTN9088
3850mAh UL Div 2 (see footnote 4)



IMPRES 2 High Capacity Battery

NNTN9089
5650mAh

NNTN9090
5650mAh UL Div 2 (see footnote 4)

For a complete list of accessories, please visit motorolasolutions.com/apxnext

MANAGED AND SUPPORT SERVICES

ACHIEVE MISSION CRITICAL PERFORMANCE


IN PUBLIC SAFETY, FOCUS IS YOUR GREATEST RESOURCE. APX NEXT PROTECTS YOUR FOCUS WHEN IT MATTERS MOST. YOUR MISSION-CRITICAL COMMUNICATIONS DEPEND ON THE CONSISTENT AVAILABILITY OF YOUR RADIOS.

Essential and Advanced Services provide the tools and expert support needed to efficiently manage your radio fleet. With Premier Services, you transfer your APX NEXT two-way radio operations to our managed services professionals who are focused on maximizing performance.

Rely on us to help you achieve your performance targets with the right service level you need for systems, devices and applications. Each package provides a higher level of support, transferring the risk and responsibility to Motorola Solutions.



SERVICES PACKAGES AT-A-GLANCE

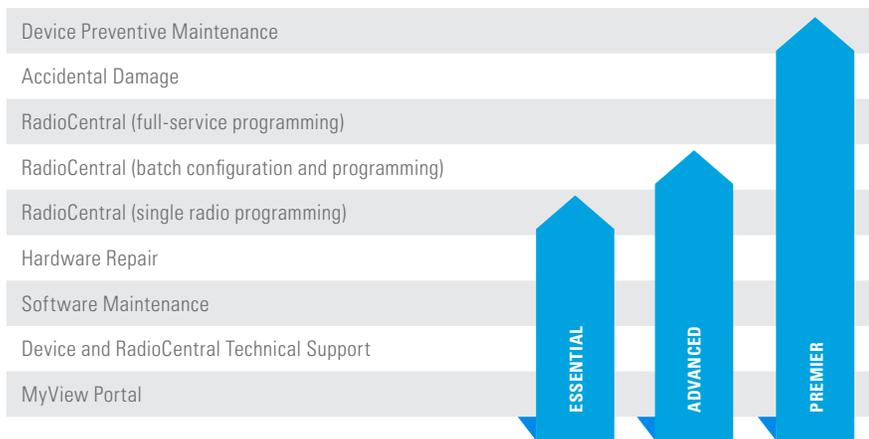

PROTECT YOUR FOCUS WHEN IT MATTERS MOST

For more information, please visit motorolasolutions.com/apxnext



Motorola Solutions, Inc. 500 West Monroe Street, Chicago, IL 60661 U.S.A. 800-367-2346 motorolasolutions.com

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 2019 Motorola Solutions, Inc. All rights reserved. 10-2019



APX
NEXT

APX™ 6500

PROJECT 25 MOBILE RADIO

We've put exceptional flexibility into an advanced mission critical mobile radio that's easy to operate and intuitive to use. The APX 6500 P25 mobile allows users to choose from 4 control heads, mid and high power models and multiple installation configurations in an easy to install design. Innovative safety features such as GPS location tracking, intelligent lighting and one-touch controls help to keep first responders safer than ever before.

Focus on the task not the technology, with the hardworking mission critical mobile that turns mission critical into mission complete.



FLEXIBLE PLATFORM

- Interchangeable control heads that best support your operational needs - 02, 03, 05, 07 and 09
- Two transceiver options - high-power and mid-power
- Dual control head support offered on the 02, 05, 07 and 09 control heads

EASY TO INSTALL AND EFFORTLESS TO USE

- Mid-power model fits into any existing XTL footprint, so you can reuse mounting holes and cables
- High-power model trunion design lets you remove the radio without removing the cables
- 12 character RF ID label helps you track information without uninstalling your radio

CUTTING-EDGE TECHNOLOGY AND ADVANCED FEATURES

- Project 25 Phase 2 technology provides twice the voice capacity
- Integrated GPS lets you locate and track an individual or vehicle
- Advanced features like intelligent lighting, radio profiles and text messaging improve communication and coordination



APX™ 6500 SPECIFICATIONS

FEATURES AND BENEFITS:

- Available in 700/800 MHz, VHF, UHF R1 and UHF R2 bands
- Channels: 1000*
- Trunking Standards supported:
 - Clear or digital encrypted Trunked Operation
 - Capable of SmartZone®, SmartZone Omnilink, SmartNet®
- Analog MDC-1200 and Digital APCO P25 Conventional System Configurations
- Narrow and wide bandwidth digital receiver (6.25kHz/12.5kHz/20kHz/25kHz)
- Embedded digital signaling (ASTRO and ASTRO 25)
- Integrated Encryption Hardware
- Software Key
- ASTRO 25 Integrated Voice & Data
- Intelligent lighting
- Integrated GPS/GLONASS for outdoor location tracking
- Radio profiles

- Unified Call List
- Meets applicable MIL-STD 810C, D, E, F and G
- Ships standard IP54
- Utilizes Windows XP, Vista and Windows 7 and 8
- Customer Programming Software (CPS)**
 - Supports USB Communications
 - Built in FLASHport™ support
- Re-use of most XTL™ accessories, plus new IMPRES accessories

OPTIONAL FEATURES:

- Enhanced Encryption Software Options
- Programming over Project 25 (POP25)
- Text Messaging
- Over the Air Rekeying (OTAR)
- 12 character RF ID asset tracking
- Tactical OTAR
- Siren and Light Interface Module

* Optional enhancement package increases capacity to 3000 channels

** CPS version R12.00.00 and greater ordered after June 2014 will only support Windows 7 and 8

TRANSMITTER - TYPICAL PERFORMANCE SPECIFICATIONS

	700 MHz		800 MHz		VHF		UHF Range 1		UHF Range 2	
Frequency Range/Bandsplits	764-776 MHz 794-806 MHz		806-824 MHz 851-870 MHz		136-174 MHz		380-470 MHz		450-520 MHz	
Channel Spacing	25/12.5 kHz		25/12.5 kHz		25/12.5 kHz		25/12.5 kHz		25/12.5 kHz	
Maximum Frequency Separation	Full Bandsplit		Full Bandsplit		Full Bandsplit		Full Bandsplit		Full Bandsplit	
Rated RF Output Power Adj [†]	10-30 W		10-35 W		10-50 W or 25-110 W		10-40 W or 25-110 W		10-45 W (450-485 MHz) 10-40 W (485-512 MHz) 10-25 W (512-520 MHz)	
Frequency Stability* (-30°C to +60°C; +25°C Ref.)	±0.00015 %		±0.00015 %		±0.0002 %		±0.0002 %		±0.0002 %	
Modulation Limiting [†]	±5 kHz / ±2.5 kHz		±5 kHz/±4 kHz (NPSPEC) /±2.5 kHz		±5 kHz / ±2.5 kHz		±5 kHz / ±2.5 kHz		±5 kHz / ±2.5 kHz	
Modulation Fidelity (C4FM) 12.5kHz Digital Channel	±2.8 kHz		±2.8 kHz		±2.8 kHz		±2.8 kHz		±2.8 kHz	
Emissions [†]	Conducted+ -75/-85 dBc	Radiated+ -20/-40 dBm	Conducted -75 dBc	Radiated -20 dBm	Conducted -85 dBc	Radiated -20 dBm	Conducted -85 dBc	Radiated -20 dBm	Conducted -85 dBc	Radiated -20 dBm
Audio Response [†]	+1, -3 dB (EIA)		+1, -3 dB (EIA)		+1, -3 dB (EIA)		+1, -3 dB (EIA)		+1, -3 dB (EIA)	
FM Hum & Noise	25 kHz 12.5 kHz	-50 dB -48 dB	-50 dB -48 dB	-50 dB -48 dB	-53 dB -52 dB	-53 dB -50 dB	-53 dB -50 dB	-53 dB -50 dB	-53 dB -50 dB	-53 dB -50 dB
Audio Distortion [†]	2 %		2 %		2 %		2 %		2 %	

DIMENSIONS

	Inches	Millimeters	
Mid Power Radio Transceiver	2 x 7 x 8.6	50.8 x 177.8 x 218.4	
O5 Control Head	2 x 7 x 2.5	50.8 x 180.3 x 63.5	
O2 Control Head	2.7 x 8 x 2.1	68.4 x 206 x 52.83	
O7 Control Head	2 x 7 x 1.5	50.8 x 178 x 40	
Mid Power Radio Transceiver and O5 Control Head-Dash Mount	2 x 7 x 9.6	50.8 x 180.3 x 243.8	
Mid Power Radio Transceiver and O2 Control Head - Dash Mount	2.7 x 8 x 10.5	68.4 x 206 x 268	
Mid Power Radio Transceiver and O7 Control Head - Dash Mount	2 x 7 x 10.3	50.8 x 178 x 262	
Mid Power Radio Transceiver and Remote Mount	2.0 x 7 x 9.6	50.8 x 180.3 x 243.8	
High Power Radio Transceiver	2.9 x 11.5 x 8.8	74 x 293 x 223	
High Power Radio Transceiver with Handle	3.4 x 11.5 x 8.8	87 x 293 x 223	
Mid Power Radio Transceiver and O5 Control Head Weight	6.6 lbs	3.0 kg	
Mid Power Radio Transceiver and O2 Control Head Weight	7.12 lbs	3.23 kg	
Mid Power Radio Transceiver and O7 Control Head Weight	6.74 lbs	3.06 kg	
High Power Radio Transceiver Weight	With Trunnion Without Trunnion	14.2 lbs 12 lbs	6.4 kg 5.4 kg

APX 6500 CONTROL HEAD PORTFOLIO



O2 RUGGED CONTROL HEAD

- Large color display with intelligent lighting
- 3 lines of text 14 characters max / 1 line of icons / 1 line of menus
- Built in 7.5 watt speaker
- Multiple control head configuration (up to 2)
- Multifunction volume/channel knob
- Night/day mode button

O3 HAND HELD CONTROL HEAD

- Large color display with intelligent lighting
- 2 lines of text 14 characters max / 1 line of icons / 1 line of menus
- Integrated full size DTMF keypad
- Hand-held control head with intuitive user interface
- Two quick-access side buttons
- Display contrast selector

O5 STANDARD CONTROL HEAD

- Tri-color display with intelligent lighting
- 2 lines of text 14 characters max / 1 line of icons / 1 line of menus
- Available with Keypad Microphone
- Multiple control head configuration (up to 2)
- Display contrast selector

O7 ENHANCED CONTROL HEAD

- Large color display with intelligent lighting
- 3 lines of text 14 characters max / 1 line of icons / 1 line of menus
- Available with Lighting & Siren Controls or DTMF Keypad
- Multiple control head configuration (up to 2)
- Multifunction volume/channel knob
- Night/day mode button

O9 INTEGRATED CONTROL HEAD

- Extra-large full color display with intelligent lighting
- 2 lines of text 14 characters max / 1 line of icons / 1 line of menus
- Integrated full size DTMF keypad
- Large programmable one-touch buttons
- Dedicated siren controls
- Integrated Response Selector
- Night/day mode button

RECEIVER – TYPICAL PERFORMANCE SPECIFICATIONS

	700 MHz	800 MHz	VHF	UHF Range 1		UHF Range 2	
Frequency Range/Bandsplits	764-776 MHz	851-870 MHz	136-174 MHz	380-470 MHz		450-520 MHz	
Channel Spacing	25/12.5 kHz	25/12.5 kHz	25/12.5 kHz	25/12.5 kHz		25/12.5 kHz	
Maximum Frequency Separation	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit		Full Bandsplit	
Audio Output Power at 3% distortion*	7.5 W or 15 W ++		7.5 W or 15 W ++				
Frequency Stability* (-30°C to +60°C; +25°C Ref.)	+/-0.8 PPM	+/-0.8 PPM	+/-0.8 PPM	+/-0.8 PPM		+/-0.8 PPM	
Analog Sensitivity*	12 dB SINAD	-121 dBm	-121 dBm	Pre-Amp -123 dBm	Standard -119 dBm	Pre-Amp -123 dBm	Standard -119 dBm
Digital Sensitivity	5% BER	-121.5 dBm	-121.5 dBm	-123 dBm	-119 dBm	-123 dBm	-119 dBm
Intermodulation	25 kHz	82 dB	82 dB	84 dB	86 dB	82 dB	86 dB
	12.5 kHz	82 dB	82 dB	85 dB	86 dB	83 dB	85 dB
Spurious Rejection		91 dB	91 dB	95 dB		93 dB	
Audio Distortion at rated*		1.20%	1.20%	1.20%		1.20%	
FM Hum & Noise	25 kHz	59 dB	59 dB	59 dB		57 dB	
	12.5 kHz	50 dB	50 dB	50 dB		50 dB	
Selectivity*	25 kHz	85 dB	85 dB	85 dB		85 dB	
	12.5 kHz	75 dB	75 dB	75 dB		75 dB	
	30 kHz	—	—	90 dB		—	

SIGNALING (ASTRO MODE)

Signaling Rate	9.6 kbps
Digital ID Capacity	10,000,000 Conventional / 48,000 Trunking
Digital Network Access Codes	4,096 network site addresses
ASTRO® Digital User Group Addresses	4,096 network site addresses
Project 25 – CAI Digital User Group Addresses	65,000 Conventional / 4,094 Trunking
Error Correction Techniques	Golay, BCH, Reed-Solomon codes
Data Access Control	Slotted CSMA: Utilizes infrastructure-sourced data status bits embedded in both voice and data transmissions.

GPS SPECIFICATIONS

Channels	12
Tracking Sensitivity	-153 dBm
Accuracy**	<10 meters (95%)
Cold Start	<60 seconds (95%)
Hot Start	<10 seconds (95%)
Mode of Operation	Autonomous (Non-Assisted) GPS

POWER AND BATTERY DRAIN

Model Type	136-174 MHz, 380-470 MHz, 450-520 MHz, 764-870 MHz				
Minimum RF Power Output	10-35 W (764-870 MHz), 10-50 W or 25-110 W (136-174 MHz), 10-40 W or 25-110 W (380-470 MHz), 10-45 W (450-485 MHz), 10-40 W (485-512 MHz), 10-25 W (512-520 MHz)				
Operation	13.8V DC ±20% Negative Ground				
Standby at 13.8V	0.85 A (764-870 MHz), 0.85 A (136-174 MHz), 0.85 A (380-470 MHz), 0.85 A (450-520 MHz)				
Receive Current at Rated Audio at 13.8V	3.2 A (764-870 MHz), 3.2 A (136-174 MHz), 3.2 A (380-470 MHz), 3.2 A (450-520 MHz)				
Transmit Current (A) at Rated Power	136-174 MHz (10-50 W) 380-470 MHz (10-40 W) 380-470 MHz (10-40 W)	13 A (50 W) 11 A (40 W) 11 A (45 W)	8 A (15 W) 8 A (15 W) 8 A (15 W)	764-870 MHz (10-35 W) 136-174 MHz (25-110 W) 380-470 MHz (25-110 W)	12 A (50 W) 8 A (15 W) 20 A (110 W) 24 A (110 W)

MOBILE MILITARY STANDARDS 810 C, D, E, F & G

	MIL-STD 810C		MIL-STD 810D		MIL-STD 810E		MIL-STD 810F		MIL-STD 810G	
	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.
Low Pressure	500.1	I	500.2	II	500.3	II	500.4	II	500.5	II
High Temperature	501.1	I, II	501.2	I/A1, II/A1	501.3	I/A1, II/A1	501.4	I/Hot, II/Hot	501.5	I-A1, II/A1
Low Temperature	502.1	I	502.2	I/C3, II/C1	502.3	I/C3, II/C1	502.4	I/C3, II/C1	502.5	I-C3, II/C1
Temperature Shock	503.1	1 Proc	503.2	I/A1C3	503.3	I/A1C3	503.4	I	503.5	I-C
Solar Radiation	505.1	II	505.2	I	505.3	I	505.4	I	505.5	I-A1
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, III	506.5	I, III
Humidity	507.1	II	507.2	II	507.3	II	507.4	1 Proc	507.5	II-Aggravated
Salt Fog	509.1	1 Proc	509.2	1 Proc	509.3	1 Proc	509.4	1 Proc	509.5	1 Proc
Blowing Dust	510.1	I	510.2	I, II	510.3	I, II	510.4	I, II	510.5	I, II
Vibration	514.1	VIII/F, Curve-W	514.3	I/10, II/3	514.4	I/10, II/3	514.5	I/24	514.6	I-cat.24
Shock	516.2	I, III, V	516.3	I, V, VI	516.4	I, V, VI	516.5	I, V, VI	516.6	I, V, VI

ENCRYPTION

Supported Encryption Algorithms	ADP, 256-bit AES, DES, DES-XL, DES-OFB, DVP-XL
Encryption Algorithm Capacity	8
Encryption Keys per Radio	Module capable of storing 1024 keys. Programmable for 64 Common Key Reference (CKR) or 16 Physical Identifier (PID)
Encryption Frame Re-sync Interval	P25 CAI 300 mSec
Encryption Keying	Key Loader
Synchronization	XL – Counter Addressing, OFB – Output Feedback
Vector Generator	National Institute of Standards and Technology (NIST) approved random number generator
Encryption Type	Digital
Key Storage	Tamper protected volatile or non-volatile memory
Key Erasure	Keyboard command and tamper detection
Standards	FIPS 140-2 Level 3 FIPS 197

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-30°C / +60°C
Storage Temperature	-40°C / +85°C
Humidity	Per MIL-STD
ESD	IEC 801-2 KV
Water and Dust Intrusion	IP54, MIL-STD

FCC TYPE ACCEPTANCE ID

BAND	OUTPUT POWER	TRANSMITTER NUMBER
764-870 MHz	10-35 W	AZ492FT5858
136-174 MHz	25-110 W	AZ492FT3821
136-174 MHz	10-50 W	AZ492FT3824
380-470 MHz	10-40 W	AZ492FT4894
380-470 MHz	25-110 W	AZ492FT4897
450-520 MHz	10-45 W	AZ492FT4896

* Measured in the analog mode per TIA/EIA 603 under nominal conditions

** Accuracy specs are for long-term tracking
(95th percentile values >5 satellites visible at a nominal -130 dBm signal strength)

+ Specs includes performance for the non-GNSS/GNSS bands

++ Output power in to 8 and 3.2 Ohm external speakers respectively

Specifications subject to change without notice. All specifications shown are typical.
Radio meets applicable regulatory requirements.



Motorola Solutions, Inc. 500 West Monroe Street, Chicago, IL 60661 U.S.A. motorolasolutions.com

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 2019 Motorola Solutions, Inc. All rights reserved. 11-2019



APX™ 8000 ALL-BAND P25 PORTABLE RADIO

UNLIMITED MOBILITY. UNCOMPROMISING PERFORMANCE.

Take command with a 4-in-1 radio that offers limitless interoperability, the clearest, loudest audio and seamless Wi-Fi® connectivity. The compact, rugged and secure APX 8000 redefines mission critical communications.

ALL BANDS, NO BOUNDARIES

With four RF bands and multi-mode system access, the APX 8000 knows no limits when it comes to interoperability. Communicate across borders using a single device. Use analog MDC 1200 or digital P25 mode, conventional or trunked operation, SmartNet or SmartZone legacy systems, clear or secure - all across 7/800MHz, VHF and UHF Range 1 & 2 bands.

HEAR AND BE HEARD MORE CLEARLY

Whether it's loud or windy, whether you whisper or yell, the APX 8000 adaptive audio engine and ultra-loud speaker brings clarity into every conversation. The radio dynamically changes the level of noise suppression, microphone gain, windporting and speaker equalization on the fly to consistently produce the loudest, clearest audio in any environment.

VOICE AND DATA, ALL AT ONCE

With Wi-Fi® access, the APX 8000 can quickly receive new codeplugs, firmware and software features in order to redeploy the radio fleet with ease as users keep talking without interruption. Mission Critical Wireless Bluetooth® connects quickly and securely with remote speaker microphones, surveillance kits and the LEX L10 Mission Critical LTE Handheld for radio remote control.

PRODUCT DATA SHEET | APX™ 8000

FIT FOR THE MISSION

Intuitively designed with a familiar look and feel, the compact APX 8000 is always comfortable to use, from your holster to your grip. It contains 4 radio bands packaged into the award-winning design of the APX 6000. The all-band antenna is flexible so it doesn't get in the way.

RUGGED, ROBUST & RELIABLE

With a water-tight seal, drop-resistant dual battery latch, pressure-tested tempered glass display and a shock-absorbing aluminum alloy endoskeleton, the APX 8000 is ready for unpredictable environments. It can survive 2 meter water submersion for 2 hours (IP68) and Motorola's renowned Accelerated Life Test.

DESIGNED TO SECURE & PROTECT

The APX 8000's voice and data is secured by multiple hardware encryption algorithms (256-bit AES, DES, ADP), up to 128 keys and the ability to re-key over the air so that sensitive information stays protected from scanners and eavesdroppers. P25 Radio Authentication ensures only valid users can access the system while two-factor authentication allows users to securely log in to databases.





RF BANDS:

700/800 MHz, VHF, UHF Range 1 & 2

OPERATION MODES:

9600 Baud Digital APCO P25 Phase 1 FDMA and Phase 2 TDMA Trunking

3600 Baud SmartNet®, SmartZone®, SmartZone, Omnilink Trunking

Digital APCO 25, Conventional, Analog MDC 1200, Quick Call II System Configurations

Narrow and wide bandwidth digital receiver (6.25 kHz equivalent/25/20/12.5 KHz)

STANDARD FEATURES:

Mission Critical Wireless Bluetooth*

ASTRO 25 Integrated Voice & Data

Integrated GPS/GLONASS for outdoor location tracking

Software Key

Text-Messaging

Voice Announcements

ISSI 8000 Roaming

Radio Profiles, Dynamic Zone

Intelligent Lighting

Single-key ADP Encryption

IP68 submersion (2 meters, 2 hours)

IMPRES Battery

ADAPTIVE AUDIO ENGINE:

3 Watt Speaker with Adaptive Equalization

Adaptive Dual-sided Operation

Adaptive Noise Suppression Intensity

Adaptive Gain Control

Adaptive Windporting

PROGRAMMING:

Utilizes Windows 7 & 8 Customer Programming Software (CPS) with Radio Management

OPTIONAL FEATURES:

Wi-Fi® 802.11 b/g/n

RFID Volume Knob

Multi-key for 128 keys and multi-algorithm

Programming Over Project 25 (OTAP)

Over the Air Rekey (OTAR)

Digital Tone Signaling

LEX L10 Collaboration

P25 Authentication

Man Down Sensor

IP68 (2m/4hr), Mil Std 512.X Delta - T

* Compatible with BT 2.1, HSP, PAN, DUN and SPP Profiles found in off-the-shelf BT accessories and BT 4.x

TRANSMITTER - TYPICAL PERFORMANCE SPECIFICATIONS

	700/800	VHF	UHF Range 1	UHF Range 2
Frequency Range/Bandsplits	764-776, 794-806 MHz 806-825, 851-870 MHz	136-174 MHz	380-470 MHz	450-520 MHz
Channel Spacing	25/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz
Maximum Frequency Separation	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit
Rated RF Output Power Adj ¹	700 MHz: 1-2.5 Watts 800 MHz: 1-3 Watts	1-6 Watts	1-5 Watts	1-5 Watts
Frequency Stability ¹ (-30°C to +60°C; +25°C Ref.)	+/- 1.0 ppm	+/- 1.0 ppm	+/- 1.0 ppm	+/- 1.0 ppm
Modulation Limiting ¹	±5 kHz / ±4 kHz / ±2.5 kHz	±5 kHz / ±4 kHz / ±2.5 kHz	±5 kHz / ±4 kHz / ±2.5 kHz	±5 kHz / ±4 kHz / ±2.5 kHz
Emissions (Conducted and Radiated) ¹	-75 dBc	-75 dBc	-75 dBc	-75 dBc
Audio Response ¹	+1, -3 dB	+1, -3 dB	+1, -3 dB	+1, -3 dB
FM Hum & Noise (25kHz / 12.5kHz) ¹	700 MHz: -49 dB/-47 dB 800 MHz: -49 dB/-46 dB	-51 dB/-51 dB	-51 dB/-51 dB	-51 dB/-47 dB
Audio Distortion (25kHz / 12.5kHz) ¹	700 MHz: 0.90 % / 0.90 % 800 MHz: 0.60 % / 0.90 %	0.50 % / 0.90 %	0.50 % / 0.90 %	0.60 % / 0.90 %

BATTERIES FOR APX 8000

Battery Capacity / Type	Dimensions (HxWxD)	Weight	Battery Part Number	Battery Capacity
Li-Ion IMPRES 2, 3400 mAh**	3.4" x 2.3" x 1.7"	6.5 oz	PMNN4486	3400 mAh
Li-Ion IMPRES 2, 4850 mAh	5.0" x 2.3" x 1.7"	11.0 oz	PMNN4487	4850 mAh
Li-Ion IMPRES 2, 5100 mAh	5.0" x 2.3" x 1.7"	11 oz	PMNN4494	5100 mAh

KEY AUDIO ACCESSORIES

Name	Type	Part Number	Features
Extreme Policing (XP) RSM	Wired	NMNN6271	Dual-Mic Noise Suppression, Emergency, Volume Control, Prog Button, IP68
Mission Critical Wireless (MCW) RSM	Bluetooth	RLN6554	Windporting, Audio Jack, Emergency, Volume Control, Task Light, IP55, 12 hour 5/35/60 Duty Cycle

**Ships standard with radio

RADIO MODELS

MODEL 1.5



MODEL 2.5



MODEL 3.5



Display	Full bitmap monochromatic LCD top display 1 line text x 8 characters 1 line of icons No menu support Multi-color backlight	Top display plus: Full bitmap color LCD display 4 lines of text x 14 characters 2 lines of icons 1 menu line x 3 menus White backlight	Top display plus: Full bitmap color LCD display 4 lines of text x 14 characters 2 lines of icons 1 menu line x 3 menus White backlight
Keypad	none	Backlit keypad 3 soft keys 4 direction Navigation key Home and Data buttons	Backlit keypad 3 soft keys 4 direction navigation key 4x3 keypad Home and Data buttons
Channel Capacity	1200	3000	3000
FLASHport Memory	2 GB	2 GB	2 GB
700/800 MHz (764-870 MHz)			
VHF (136-174 MHz)			
UHF Range 1 (380-470 MHz)	H91TGD9PW5AN	H91TGD9PW6AN	H91TGD9PW7AN
UHF Range 2 (450-520 MHz)			

Buttons & Switches

Large PTT button ■ Angled On/Off volume control ■ Orange emergency button ■ 16 position top-mounted rotary switch
■ 2-position concentric switch ■ Multi-color backlight ■ 3-position toggle switch ■ 3 programmable side buttons

Regulatory Information

FCC ID

AZ489FT7061

Industry Canada

109U-89FT7061

Emission Designators

LMR: 8K10F1D, 8K10F1E, 8K10F1W, 11K0F3E, 16K0F3E***, 20K0F1E***
Bluetooth: 852KF1D, 1M17F1D, 1M19F1D
WLAN (Wi-Fi): 13M7G1D, 17M0D1D, 18M1D1D
®

*** In accordance with FCC mandate, the APX 8000 all band radio is restricted to 12.5kHz operation only and does NOT support 25kHz in the VHF and UHF Bands (excluding T-Band). This applies to customers under Rule Part 90.

RECEIVER - TYPICAL PERFORMANCE SPECIFICATIONS

	700	800	VHF	UHF
Frequency Range/Bandsplits	764-776 MHz	851-870 MHz	136-174 MHz	380-520 MHz
Channel Spacing	25/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz
Maximum Frequency Separation	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit
Audio Output Power at Rated ¹	1 Watt	1 Watt	1 Watt	1 Watt
Frequency Stability ¹ (-30°C to +60°C; +25°C Ref.)	+/- 1.0 ppm	+/- 1.0 ppm	+/- 1.0 ppm	+/- 1.0 ppm
Analog Sensitivity ¹	12 dB SINAD	0.224 uV	0.168 uV	0.199 uV
Digital Sensitivity ²	1% BER	0.316 uV	0.251 uV	0.282 uV
	5% BER	0.211 uV	0.149 uV	0.158 uV
	5% BER Faded	0.562 uV	0.562 uV	0.530 uV
Selectivity (25 kHz / 12.5 kHz) ^{1,5}	79 dB / 72 dB	78 dB / 72 dB	82 dB / 77 dB	80 dB / 74 dB
Intermodulation Rejection ¹	81 dB	80 dB	82 dB	80 dB
Spurious Rejection ¹	98 dB	98 dB	92 dB	98 dB
FM Hum and Noise (25 kHz / 12.5 kHz) ¹	-55 dB / -53 dB	-54 dB / -52 dB	-57 dB / -55 dB	-56 dB / -54 dB
Audio Distortion ¹	0.9 %	0.9 %	0.9 %	0.9 %

PORTABLE MILITARY STANDARDS 810 C, D, E, F & G

	MIL-STD 810C		MIL-STD 810D		MIL-STD 810E		MIL-STD 810F		MIL-STD 810G	
	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.
Low Pressure	500.1	I	500.2	II	500.3	II	500.4	II	500.5	II
High Temperature	501.1	I, II	501.2	I/A1, II/A1	501.3	I/A1, II/A1	501.4	I/Hot, II/Hot	501.5	I/A1, II/A1
Low Temperature	502.1	I	502.2	I/C3, II/C1	502.3	I/C3, II/C1	502.4	I/C3, II/C1	502.5	I/C3, II/C1
Temperature Shock	503.1	I	503.2	I/A1C3	503.3	I/A1C3	503.4	I	503.5	I/C
Solar Radiation	505.1	II	505.2	I	505.3	I	505.4	I	505.5	I/A1
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, III	506.5	I, III
Humidity	507.1	II	507.2	II	507.3	II	507.4	1 Proc	507.5	II/Aggravated
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	1 Proc	509.5	1 Proc
Blowing Dust	510.1	I	510.2	I	510.3	I	510.4	I	510.5	I
Blowing Sand	1 Proc	1 Proc	510.2	II	510.3	II	510.4	II	510.5	II
Submersion ⁶	512.1	I	512.2	I	512.3	I	512.4	I	512.5	I
Vibration	514.2	VIII/F, Curve-W	514.3	I/10, II/3	514.4	I/10, II/3	514.5	I/24	514.6	I/24
Shock	516.2	I, III, V	516.3	I, V, VI	516.4	I, V, VI	516.5	I, V, VI	516.6	I, V, VI
Shock (Drop)	516.2	II	516.2	IV	516.4	IV	516.5	IV	516.6	IV

DIMENSIONS OF THE RADIOS WITHOUT BATTERY

	Inches	Millimeters
Length	5.47	139
Width Push-To-Talk button	2.39	60.7
Depth Push-To-Talk button	1.40	35.6
Width Top	2.98	75.7
Depth Top	1.58	40.1
Depth Bottom of Battery	1.24	31.5
Weight of the radios without battery	11.25 oz	319 g

ENCRYPTION

Supported Encryption Algorithms	ADP, 256-bit AES, DES, DES-XL, DES-OFB, DVP-XL, Localized Algorithm
Encryption Algorithm Capacity	8
Encryption Keys per Radio	Module capable of storing 1024 keys. Programmable for 128 Common Key Reference (CKR) or 16 Physical Identifier (PID)
Encryption Frame Re-sync Interval	P25 CAI 360 mSec
Encryption Keying	Key Loader and Over the Air Rekeying (OTAR)
Synchronization	XL – Counter Addressing OFB – Output Feedback
Vector Generator	National Institute of Standards and Technology (NIST) approved random number generator
Encryption Type	Digital and SecureNet
Key Storage	Tamper protected volatile or non-volatile memory
Key Erasure	Keyboard command and tamper detection
Standards	FIPS 140-2 Level 3 FIPS 197

WIRELESS CONNECTIVITY & SECURITY

Frequency Range/Bandsplits:
Bluetooth: 2402 - 2480 MHz, WLAN (Wi-Fi[®]): 2400 - 2483.5 MHz

WLAN (Wi-Fi[®]) 802.11 b/g/n supports WPA-2, WPA, WEP security protocols; radio can be pre-provisioned with up to 20 SSIDs

Mission Critical Wireless Bluetooth 2.1 uses 96 bit encryption for pairing & 128 bit encryption for voice, signaling and data. The radio BT supports up to 6 data connections and 1 audio connection.

Bluetooth Low Energy uses 128-bit AES-CCM encryption

GPS/GNSS SPECIFICATIONS

Constellations	GPS & GLONASS
Tracking Sensitivity	-164 dBm
Accuracy ³	<5 meters (95%)
Cold Start ³	<60 seconds (95%)
Hot Start ³	<5 seconds (95%)
Mode of Operation	Autonomous (Non-Assisted)

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature ⁴	-30°C / +60°C
Storage Temperature ⁴	-40°C / +85°C
Humidity	Per MIL-STD
ESD	IEC 801-2 KV
Water and Dust Intrusion	IP68 (2 meters, 2 hours)

RUGGED OPTION SPECIFICATIONS

Leakage (submersion) ⁶	MIL-STD-810 C, D, E, F and G Method 512.X Procedure I, IP68 (2 meters, 4 hours)
-----------------------------------	--

HOUSING COLOR

Black (Standard), Public Safety Yellow, and High Impact Green

¹ Measured conductively in analog mode per TIA / EIA 603 under nominal conditions.

² Measured conductively in digital mode per TIA / EIA IS 102.CAAA under nominal conditions.

³ Measured conductively with >6 satellites visible at a nominal -130 dBm signal strength. Specs provided are 95th percentile values.

⁴ Temperatures listed are for radio specifications. Battery storage is recommended at 25°C, ±5°C to ensure best performance.

⁵ Measured using the TIA-603 single-tone method.

⁶ Rugged option only. Specifications subject to change without notice.

All specifications shown are typical.
Radio meets applicable regulatory requirements.

Motorola Solutions, Inc. 1301 East Algonquin Road Schaumburg, Illinois 60196, U.S.A. 800-367-2346 www.motorolasolutions.com/APX8000

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 2019 Motorola Solutions, Inc. All rights reserved. 11-2019



APX™ 6000 SINGLE-BAND PORTABLE RADIO



From day one, the single-band APX 6000 P25 portable radio has delivered legendary APX ruggedness and reliability, without compromising on the form factor or features required for routine activities and extreme emergencies. Now, as the ever-increasing needs of public safety personnel grow, we are evolving the APX 6000 to support newer technologies like Wi-Fi®, Adaptive Audio Engine, and Bluetooth® 4.0 wireless technology. These advances help improve the operational efficiency and response time of public safety agencies while enhancing the safety of personnel and communities.

VOICE AND DATA, ALL AT ONCE

Update your radio fleet without interrupting voice communications with secure Wi-Fi. This dramatically improves the speed of configuring new codeplugs, firmware and software features over-the-air via Radio Management*. Agencies can pre-provision up to 20 secure Wi-Fi hotspots so personnel can easily access updates at the facility or in the field.

HEAR AND BE HEARD

The APX 6000 is equipped with a 3-watt speaker, 3 integrated microphones and the Adaptive Audio Engine. This changes the level of noise suppression, microphone gain, windporting and speaker equalization to produce clear and loud audio in any environment.

SEAMLESS ON-SCENE COMMUNICATION

Ensure fast and seamless communication and collaboration across all responders arriving on a scene. Mission Critical Geofence automatically changes a radio's active talkgroup based on its GPS location and an agency-defined virtual barrier. For example, an incident commander can create a geofence around the 3-block radius of a burning building so that all arriving personnel are automatically placed in the same talkgroup.

EMERGENCY FIND ME

Bluetooth 4.0 places a wide range of wireless accessories at your disposal and provides personnel with an added level of security by improving response time in emergencies. With Emergency Find Me, a Bluetooth-enabled beacon signal guides other Bluetooth-enabled APX radios within range to assist the user in distress.



*Radio Management application simplifies APX radio configuration and management by programming up to 16 radios at one time and tracking which radios have been successfully programmed, providing a clear view of the entire radio fleet and a codeplug history for each radio.



SPECIFICATIONS

RF BANDS

- 700/800 MHz, VHF, UHF Range 1 & UHF Range 2
- 9600 Baud Digital APCO P25 Phase 1 FDMA and Phase 2 TDMA Trunking
- 3600 Baud SmartNet®, SmartZone®, SmartZone, Omnilink Trunking
- Digital APCO 25, Conventional, Analog MDC 1200, Quick Call II System Configurations Narrow and Wide Bandwidth Digital Receiver (6.25 kHz Equivalent/25/20/12.5 kHz)¹

STANDARD FEATURES

- Mission Critical Wireless Bluetooth® 4.0 (LE)²
- Emergency Find Me²
- ASTRO® 25 Integrated Voice & Data
- Integrated GPS/GLONASS for Outdoor Location Tracking
- Voice Announcements
- ISSI 8000 Roaming
- Radio Profiles
- Dynamic Zone
- Intelligent Lighting
- Single-Key ADP Encryption
- IP68 submersion (2 meters, 2 hours)
- IMPRES 2 Battery (PMNN4485)
- Text Message
- Software Key

PROGRAMMING

- Utilizes Windows 7 & 8 Customer Programming Software (CPS) with Radio Management³

ADAPTIVE AUDIO ENGINE (OPTIONAL)

- 3-W Speaker with Adaptive Equalization
- Adaptive Dual-Sided Operation
- Adaptive Noise Suppression Intensity
- Adaptive Gain Control
- Adaptive Windporting

OPTIONAL FEATURES

- Wi-Fi 802.11 b/g/n
- LEX L10 Collaboration
- RFID Volume Knob
- Multi-key for 128 keys and Multi-Algorithm
- Programming Over Project 25 (OTAP)
- Over the Air Rekey (OTAR)
- Digital Tone Signaling
- Mission Critical Geofence
- P25 Authentication
- Man Down Capability
- High Impact Green and Public Safety Yellow Colored Housing Options
- Rugged Option: IP68 (2m/4hr), Mil Std 512.X Delta - T⁴
- Listed by UL to the standards ANSI/TIA 4950-A and CAN/CSA C22.2 NO. 157-92 Classification Rating: Class I, Division 1, Groups C, D; Class II, Division 1, Group E, F, G; Class III, Hazardous (Classified) Locations. ANSI/ISA 12.12.01-2015 and CAN/CSA C22.2 No. 213-15; Class I, Division 2, Groups A, B, C, D; T3C. Tamb = -25° C to +60° C. when used with Motorola Battery: NNTN8921A NNTN8930A 7.4V

¹ Per the FCC Narrowbanding rules, new products (APX6000 UHF1, UHF2) submitted for FCC certification after January 1, 2011 are restricted from being granted certification at 25 KHz for United States - State & Local Markets only.

² Compatible with BT 2.1, HSP, PAN, DUN and SPP Profiles found in off-the-shelf Bluetooth accessories and Bluetooth 4.x

³ CPS version R12.00.00 and greater ordered after June 2014 will only support Windows 7 and 8

⁴ Radios meet industry standards (IPx7) for submersion.

TRANSMITTER - TYPICAL PERFORMANCE SPECIFICATIONS

		700/800	VHF	UHF Range 1	UHF Range 2
Frequency Range/Bandsplits	700 MHz 800 MHz	763-776, 793-806 MHz 806-824, 851-870 MHz	136-174 MHz	380-470 MHz	450-520 MHz
Channel Spacing		25/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz
Maximum Frequency Separation		Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit
Rated RF Output Power Adj ¹		1-3 Watts Max	1-6 Watts Max	1-5 Watts Max	1-5 Watts
Frequency Stability ¹ (-30°C to +60°C; +25°C Ref.)		±0.00010 %	±0.00010 %	±0.00010 %	±0.00010 %
Modulation Limiting ¹		±5 kHz / ±4 kHz / ±2.5 kHz	±5 kHz / ±4 kHz / ±2.5 kHz	±5 kHz / ±4 kHz / ±2.5 kHz	±5 kHz / ±4 kHz / ±2.5 kHz
Emissions (Conducted and Radiated) ¹		-75 dB	-75 dB	-75 dB	-75 dB
Audio Response ¹		+1, -3 dB	+1, -3 dB	+1, -3 dB	+1, -3 dB
FM Hum & Noise	25k 25.5k	-52 dB -47 dB	-55 dB -50 dB	-52 dB -47 dB	-52 dB -46 dB
Audio Distortion ¹	700 MHz 800 MHz	1.00 %	1.00 %	1.00 %	1.00 %

BATTERIES FOR APX 6000

Battery Capacity / Type	Dimensions (HxWxD)	Weight	Battery Part Number	Battery Capacity
Li-Ion IMPRES 2 2550mAh ¹	3.4" x 2.3" x 1.5"	5.0 oz	PMNN4485	2550 mAh
Li-Ion IMPRES 2 3400mAh	3.4" x 2.3" x 1.7"	6.5 oz	PMNN4486	3400 mAh
Li-Ion IMPRES 2 4850mAh	5" x 2.3" x 1.7"	11.0 oz	PMNN4487	4850 mAh
Li-Ion IMPRES 2 5100mAh	5" x 2.3" x 1.7"	11.0 oz	PMNN4494	5100 mAh
Li-Ion IMPRES 2 2650 mAh ²	3.4" x 2.3" x 1.7"	5.7 oz	NNTN8930	2650 mAh
Li-Ion IMPRES 2 4500mAh ²	5" x 2.3" x 1.7"	11.0 oz	NNTN8921	4500 mAh

¹ The standard shipping battery for the APX6000
² HAZLOC approved.

RADIO MODELS

	 MODEL 1.5	 MODEL 2.5	 MODEL 3.5
Display	Full bitmap monochromatic LCD top display 1 line text x 8 characters 1 line of icons No menu support Multi-color backlight	Top display plus: Full bitmap color LCD display 4 lines of text x 14 characters 2 lines of icons 1 menu line x 3 menus White backlight	Top display plus: Full bitmap color LCD display 4 lines of text x 14 characters 2 lines of icons 1 menu line x 3 menus White backlight
Keypad	none	Backlit keypad 3 soft keys 4 direction Navigation key Home and Data buttons	Backlit keypad 3 soft keys 4 direction Navigation key 4x3 keypad Home and Data buttons
Channel Capacity ¹	96	1000	1000
FLASHport Memory	64 MB	64 MB	64 MB
700/800 MHz (763-870 MHz)	H98UCD9PW5BN	H98UCF9PW6BN	H98UCH9PW7BN
VHF (136-174 MHz)	H98KGD9PW5BN	H98KGF9PW6BN	H98KGH9PW7BN
UHF Range 1 (380-470 MHz)	H98QDD9PW5BN	H98QDF9PW6BN	H98QDH9PW7BN
UHF Range 2 (450-520 MHz)	H98SDD9PW5BN	H98SDF9PW6BN	H98SDH9PW7BN

Buttons & Switches

Large PTT button ■ Angled On/Off volume control ■ Orange emergency button ■ 16 position top-mounted rotary switch
 ■ 2-position concentric switch ■ Multi-color backlight ■ 3-position toggle switch ■ 3 programmable side buttons

Regulatory Information

	FCC ID	Industry Canada
700/800 (764-869 MHz)	AZ489FT7086	109U-89FT7086
VHF (136-174 MHz)	AZ489FT7087	109U-89FT7087
UHF Range 1 (380-470 MHz)	AZ489FT7077	109U-89FT7077
UHF Range 2 (420-520 MHz)	AZ489FT7085	109U-89FT7085

FCC Emissions Designators

FCC Emissions Designators 11K0F3E, 16K0F3E, 8K10F1D, 8K10F1E, 8K10F1W, 20K0F1E²

Power Supply

Power Supply One rechargeable Li-Ion IMPRES 2 2550mAh battery standard (PMNN4485), with alternate battery options available.

¹ Enhancement package available
² Per the FCC Narrowbanding rules, new products (APX6000 UHFRR1, UHFRR2) submitted for FCC certification after January 1, 2011 are restricted from being granted certification at 25 kHz for United States - State & Local Markets only.

RECEIVER - TYPICAL PERFORMANCE SPECIFICATIONS					
		700/800	VHF	UHF Range 1	UHF Range 2
Frequency Range/Bandsplits	700 MHz 800 MHz	763-776 MHz 851-870 MHz	136-174 MHz	380-470 MHz	450-520 MHz
Channel Spacing		25/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz
Maximum Frequency Separation		Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit
Audio Output Power at Rated ¹		500 mW	500 mW	500 mW	500 mW
Analog Sensitivity ²	12 dB SINAD	0.25 μ V	0.17 μ V	0.224 μ V	0.203 μ V
Digital Sensitivity ³	1% BER (800 MHz)	0.375 μ V	0.243 μ V	0.298 μ V	0.296 μ V
	5% BER	0.24 μ V	0.15 μ V	0.200 μ V	0.204 μ V
Selectivity ¹	25 kHz channel	-76 dB	-78 dB	-77 dB	-76 dB
	12.5 kHz channel	-70 dB	-73 dB	-67 dB	-67 dB
Intermodulation		-80.1 dB	-80.2 dB	-80.3 dB	-80.2 dB
Spurious Rejection		-75 dB	-78 dB	-80.5 dB	-80.8 dB
FM Hum and Noise	25 kHz	-54 dB	-54.3 dB	-53.5 dB	-52.5 dB
	12.5 kHz	-79 dB	-50.1 dB	-47.5 dB	-47.3 dB
Audio Distortion at Rated ¹		0.90%	0.90%	0.70%	0.70%

¹ Measured in the analog mode per TIA / EIA 603 under nominal conditions

² Measured conductively in analog mode per TIA / EIA 603 under nominal conditions.

³ Measured conductively in digital mode per TIA / EIA IS 102.CAAA under nominal conditions.



PORTABLE MILITARY STANDARDS 810 C, D, E, F & G

	MIL-STD 810C		MIL-STD 810D		MIL-STD 810E		MIL-STD 810F		MIL-STD 810G	
	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.
Low Pressure	500.1	I	500.2	II	500.3	II	500.4	II	500.5	II
High Temperature	501.1	I, II	501.2	I/A1, II/A1	501.3	I/A1, II/A1	501.4	I/Hot, II/Basic Hot	501.5	I/A1, II/A2
Low Temperature	502.1	I	502.2	I/C3, II/C1	502.3	I/C3, II/C1	502.4	I/C3, II/C1	502.5	I/C3, II/C1
Temperature Shock	503.1	I	503.2	I/A1C3	503.3	I/A1C3	503.4	I	503.5	I/C
Solar Radiation	505.1	II	505.2	I	505.3	I	505.4	I	505.5	I/A1
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, III	506.5	I, III
Humidity	507.1	II	507.2	II	507.3	II	507.4	1 Proc	507.5	II/Aggravated
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	1 Proc	509.5	1 Proc
Blowing Dust	510.1	I	510.2	I	510.3	I	510.4	I	510.5	I
Blowing Sand	1 Proc	1 Proc	510.2	II	510.3	II	510.4	II	510.5	II
Immersion	512.1	I	512.2	I	512.3	I	512.4	I	512.5	I
Vibration	514.2	VIII/F, Curve-W	514.3	I/10, II/3	514.4	I/10, II/3	514.5	I/24	514.6	I/24
Shock	516.2	I, III, V	516.3	I, V, VI	516.4	I, V, VI	516.5	I, V, VI	516.6	I, V, VI
Shock (Drop)	516.2	II	516.2	IV	516.4	IV	516.5	IV	516.6	IV



DIMENSIONS OF THE RADIOS WITHOUT BATTERY

Length	5.47 in	139 mm
Width Push-To-Talk button	2.39 in	60.7 mm
Depth Push-To-Talk button	1.40 in	35.6 mm
Width Top	2.98 in	75.7 mm
Depth Top	1.58 in	40.1 mm
Depth Bottom of Battery	1.24 in	31.5 mm
Weight of the radios without battery	10.9 oz	309 g

ENCRYPTION

Supported Encryption Algorithms	ADP, 256-bit AES, DES, DES-XL, DES-OFB, DVP-XL
Encryption Algorithm Capacity	8
Encryption Keys per Radio	Module capable of storing 1024 keys. Programmable for 64 Common Key Reference (CKR) or 16 Physical Identifier (PID)
Encryption Frame Re-sync Interval	P25 CAI 300 mSec
Encryption Keying	Key Loader
Synchronization	XL – Counter Addressing OFB – Output Feedback
Vector Generator	National Institute of Standards and Technology (NIST) approved random number generator
Encryption Type	Digital
Key Storage	Tamper protected volatile or non-volatile memory
Key Erasure	Keyboard command and tamper detection
Standards	FIPS 140-2 Level 3 FIPS 197

GPS/GNSS SPECIFICATIONS

Constellations	GPS & GLONASS
Tracking Sensitivity	-164 dBm
Accuracy ²	<5 meters (95%)
Cold Start	<60 seconds (95%)
Hot Start	<5 seconds (95%)
Mode of Operation	Autonomous (Non-Assisted)

RUGGED SPECIFICATIONS

Leakage (submersion)	MIL-STD-810 C, D, E, F and G Method 512.X Procedure I, IP68 (2 meters, 4 hours)
----------------------	---

HOUSING COLOR

Black (Standard), Public Safety Yellow, and High Impact Green

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature ¹	-30 °C to +60 °C
Storage Temperature ¹	-50 °C to +85 °C
Humidity Per MIL-STD	ESD IEC 801-2 KV
Water and Dust Intrusion	IP68 (2 meters, 4 hours)

¹ Temperatures listed are for radio specifications. Battery storage is recommended at 25 °C, ±5 °C to ensure best performance.

² Measured conductively with >6 satellites visible at a nominal -130 dBm signal strength. Specs provided are 95th percentile values.

EMISSION DESIGNATORS

LMR: 8K10F1D, 8K10F1E, 8K10F1W, 11K0F3E, 16K0F3E, 20K0F1E

Bluetooth: 852KF1D, 1M17F1D, 1M19F1D, 1M04F1D

WLAN (Wi-Fi): 13M7G1D, 17M0D1D, 18M1D1D

WIRELESS CONNECTIVITY AND SECURITY

Frequency Range/Bandsplits:

Bluetooth: 2402 - 2480 MHz, WLAN (Wi-Fi): 2400 - 2483.5 MHz

WLAN (Wi-Fi) 802.11 b/g/n supports WPA-2, WPA, WEP security protocols; radio can be pre-provisioned with up to 20 SSIDs¹

Mission Critical Wireless Bluetooth 2.1 uses 96 bit encryption for pairing & 128 bit encryption for voice, signaling and data. The radio BT supports up to 6 data connections and 1 audio connection

Bluetooth 4.0 Low Energy uses 128-bit AES-CCM encryption

¹ 2400 - 2483.5 MHz for EMEA region and includes guardband.
Channels 1 – 11 used for FCC/IC region.



MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. ©2019 Motorola, Inc. All rights reserved. 11-2019



PRODUCT DATA SHEET | APX 6000 SINGLE-BAND PORTABLE RADIO



APX 8500

ALL-BAND P25 MOBILE RADIO



UNLIMITED MOBILITY. MAXIMUM CONNECTIVITY.

Your next incident doesn't care about frequencies and neither should your first responders. Give them the communication tools to stay connected and stay safe wherever the call takes them. Give them the APX 8500 all-band mobile radio.

The APX 8500 radio enables you to exchange critical voice and data seamlessly with multiple agencies and jurisdictions operating on different radio bands. The available high-power transmitter gives you extraordinary P25 range while the integrated Wi-Fi or tethered

in-vehicle broadband modem can extend communication beyond P25 radio service areas. Offload data to a broadband connection and create a data ecosystem in and around your vehicle. Or, use your broadband connection to send and receive P25 voice and data when outside of P25 coverage. And when your vehicle sustains a high impact, the radio can automatically send an alert to dispatch.

Stay connected and stay safe in more ways than ever with the all-band APX 8500 mobile radio.





ALL-BAND CONNECTIVITY

ALL BANDS. NO BOUNDARIES.

With a 4-in-1 mobile radio and an all-band antenna, you now have the ability to stay connected and expand communications across multiple agencies with one device. Extend your reach further with an available high-power transmitter and communicate with widely dispersed teams across different bands.



BUILT-IN Wi-Fi

VOICE AND DATA, ALL AT ONCE

Packed with all the connections you need, the APX 8500 keeps your team in touch and within reach of over-the-air updates. Receive new codeplugs, firmware updates and software features at the speed of Wi-Fi— without interruptions to voice communications.



SMARTCONNECT

GET CONNECTED AND STAY CONNECTED

When the mission takes you out of range, you risk being left in the dark. The APX 8500, equipped with SmartConnect, can reroute P25 voice and data communication over broadband via built-in Wi-Fi or a tethered LTE/satellite router. Stay connected to your P25 radio system, even when outside of P25 coverage.



RF antenna port

GPS

Wi-Fi

Accessory connector

DC power



ViQi VIRTUAL PARTNER

FAST INFORMATION RETRIEVAL

Running routine database queries doesn't need to slow you down. Simply press a button on the keypad microphone and ask ViQi for the information you need. Keep your eyes on the situation and free up dispatchers to focus on more critical events. Move intelligence faster than ever with ViQi.



DESIGNED TO SECURE AND PROTECT

KEEP VOICE AND DATA PROTECTED

The APX 8500 secures voice and data using multiple hardware encryption algorithms and the ability to rekey over the air, so it's protected from scanners and eavesdroppers. What's more, P25 Radio Authentication ensures only valid users can access the system while the available two-factor authentication secures database logins.



DEVICE MANAGEMENT SERVICES

ALL THE SUPPORT YOU NEED

Motorola Solutions offers three levels of service plans – Essential, Advanced and Premier. From simple support for technical troubleshooting to a complete transfer of optimization and maintenance services to Motorola Solutions, you choose the level of support that suits you best.

02 CONTROL HEAD

EXTREME USABILITY

The 02 control head provides rugged simplicity for efficient and confident communication. Extreme controls with easy to read color display and a built-in 7.5 watt speaker provides clear visual and audible user experiences. Available in high impact green or black.



03 HANDHELD CONTROL HEAD

HANDHELD FLEXIBILITY

The 03 corded control head fits all your mobile controls in your hand. With the 03 your radio controls are never out of reach.



APX 8500 CONTROL HEADS*



E5 CONTROL HEAD

UNMATCHED READABILITY. OPTIMIZED USABILITY.

A bright color display and intelligent lighting makes the E5 easy to read under any condition while the optimized tactility and button placement reduces inadvertent actuations.

07 CONTROL HEAD

INTEGRATED MULTI-FUNCTIONALITY

The 07 is a sophisticated control head with a color display and built-in keypad. It can integrate your radio vehicle control into a single ergonomic interface and supports dual radio installations.

FEATURES

OPERATION MODES

Digital Trunking: 9600 Baud APCO P25 Phase 1 FDMA and Phase 2 TDMA

Digital Conventional: APCO 25

Analog Trunking: 3600 Baud SmartNet, SmartZone, Omnilink

Analog Conventional: MDC 1200

ASTRO® 25 Integrated Voice and Data

SmartConnect Multi-net Connectivity*

FREQUENCY BANDS

All-band: Simultaneous Operation in VHF, UHF Range 1, UHF Range 2, 700 and 800 MHz Bands

100 Watt High-Power available in VHF and UHF Range 1 bands (High-Power model only)

Up to 3,000 Channels

ADDITIONAL CONNECTIVITY

Wi-Fi 802.11 b/g/n*

Data Modem Tethering*

SmartConnect*

MANAGEMENT

Radio Management

Customer Programming Software

LOCATION-TRACKING

Integrated GPS/GLONASS for Outdoor Location Tracking

Mission-Critical Geofence*

SECURITY

256-bit AES, ADP, DES, DVP*

FIPS 140-2 Level 3, FIPS 197

P25 Authentication*

Multikey for 128 keys and Multi-algorithm*

Over-The-Air-Rekeying (OTAR)*

USER INTERFACE

07 Multi Functional Control Head

E5 Enhanced Control Head

03 Handheld Control Head

02 Extreme Usability Control Head

Supports the discontinued 09 Control Head and the 05 Control Head

OTHER FEATURES

Intelligent Priority Scan

Instant Recall

Impact Detection*

Intelligent Lighting

Tactical Inhibit*

Digital Tone Signaling*

12 Character RFID Asset Tracking*

ViQi Virtual Partner*






DIMENSIONS AND WEIGHT

	Dimensions (H x W x D)	Weight
O7 Control Head - Remote Mount	51 x 178 x 81 mm (2.0 x 7.0 x 3.2 in)	-
E5 Control Head - Remote Mount	51 x 178 x 79 mm (2.0 x 7.0 x 3.1 in)	-
O5 Control Head - Remote Mount	51 x 178 x 74 mm (2.0 x 7.0 x 2.9 in)	-
O2 Control Head - Remote Mount	68 x 206 x 96 mm (2.7 x 8.1 x 3.8 in)	-
Mid Power Radio Transceiver and O7 Control Head - Dash Mount	51 x 178 x 256 mm (2.0 x 7.0 x 10.1 in)	3.1 kg (6.8 lbs)
Mid Power Radio Transceiver and E5 Control Head - Dash Mount	51 x 178 x 255 mm (2.0 x 7.0 x 10.0 in)	3.1 kg (6.8 lbs)
Mid Power Radio Transceiver and O5 Control Head - Dash Mount	51 x 178 x 250 mm (2.0 x 7.0 x 9.8 in)	3.1 kg (6.8 lbs)
Mid Power Radio Transceiver and O2 Control Head - Dash Mount	68 x 206 x 271 mm (2.7 x 8.1 x 10.7 in)	3.3 kg (7.23 lbs)
Mid Power Radio Transceiver and Remote Mount	51 x 178 x 232 mm (2.0 x 7.0 x 9.1 in)	2.9 kg (6.4 lbs)
High Power Radio Transceiver and Remote Mount	88 x 248 x 320 mm (3.4 x 9.7 x 12.6 in)	8.0 kg (17.6 lbs)



APX 8500 High-Power Model Shown

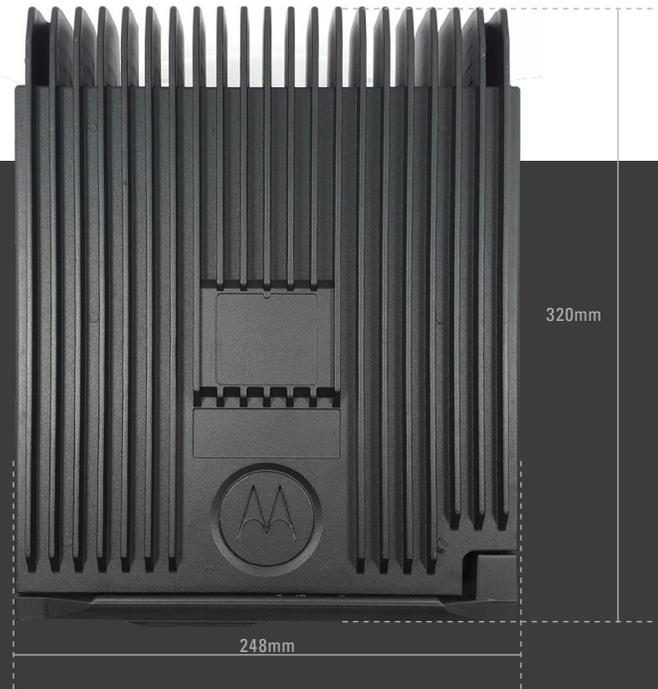

PERFORMANCE AND REGULATORY

TRANSMITTER- TYPICAL PERFORMANCE SPECIFICATIONS

	VHF	UHF R1	UHF R2	700 MHz	800 MHz					
Frequency Range Band Splits	136-174 MHz	380-470 MHz	450-520 MHz	764-776, 794-806 MHz 806-825, 851-870 MHz	764-776, 794-806 MHz 806-825, 851-870 MHz					
Channel Spacing	30/25/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz					
Maximum Frequency Separation	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit					
Rated RF Output Power ¹ (Adjustable)	1-50 W (Mid Power) 1-100 W (High Power)	1-40 W (Mid Power) 1-100 W (High Power)	1-45 W (450-485 MHz) 1-40 W (485-512 MHz) 1-25 W (512-520 MHz)	1-30 W	1-35 W					
Frequency Stability ¹ (-30°C to +85°C; +25°C Ref.)	±0.8 PPM	±0.8 PPM	±0.8 PPM	±0.8 PPM	±0.8 PPM					
Modulation Limiting	±5/±2.5 kHz	±5/±2.5 kHz	±5/±2.5 kHz	±5/±2.5 kHz	±5/±4 (NPSPEC) / ±2.5 kHz					
Modulation Fidelity (C4FM) 12.5 kHz Digital Channel	1.10%	1.10%	1.10%	1.10%	1.10%					
Emissions ¹	Conducted -85 dBc	Radiated -20 dBm	Conducted -85 dBc	Radiated -20 dBm	Conducted -85 dBc	Radiated -20 dBm	Conducted -75/-85 dBc	Radiated -20/-40 dBm	Conducted -75 dBc	Radiated -20 dBm
Audio Response ¹	+1, -3 dB (EIA)		+1, -3 dB (EIA)		+1, -3 dB (EIA)		+1, -3 dB (EIA)		+1, -3 dB (EIA)	
FM Hum & Noise ¹ (25 kHz / 12.5 kHz)	53 dB / 52 dB		53 dB / 50 dB		53 dB / 50 dB		50 dB / 48 dB		50 dB / 48 dB	
Audio Distortion ¹ (25 & 20 kHz / 12.5 kHz)	0.50% / 0.50%		0.50% / 0.50%		0.50% / 0.50%		0.50% / 0.50%		0.50% / 0.50%	

RECEIVER - TYPICAL PERFORMANCE SPECIFICATIONS

	VHF	UHF R1	UHF R2	700 MHz	800 MHz					
Frequency Range Band Splits	136-174 MHz	380-470 MHz	450-520 MHz	764-776 MHz 799-806 MHz	851-870 MHz					
Channel Spacing	30/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz	25/20/12.5 kHz					
Minimum Frequency Separation	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit					
Audio Output Power 3% distortion, 8/3.2 Ohm speakers	7.5 W/15 W	7.5 W/15 W	7.5 W/15 W	7.5 W/15 W	7.5 W/15 W					
Frequency Stability ¹ (-30 °C to +85 °C; +25 °C Ref.)	±0.8 PPM	±0.8 PPM	±0.8 PPM	±0.8 PPM	±0.8 PPM					
Analog Sensitivity ¹ (12 dB SINAD)	Pre-Amp -123 dBm (0.158 µV)	Standard -119 dBm (0.251 µV)	Pre-Amp -123 dBm (0.158 µV)	Standard -119 dBm (0.251 µV)	Pre-Amp -123 dBm (0.158 µV)	Standard -119 dBm (0.251 µV)	-121 dBm (0.199 µV)	-120 dBm (0.224 µV)	-121 dBm (0.199 µV)	
Digital Sensitivity (5% BER)	-123 dBm (0.158 µV)	-119 dBm (0.251 µV)	-123 dBm (0.158 µV)	-119 dBm (0.251 µV)	-123 dBm (0.158 µV)	-119 dBm (0.251 µV)	-123 dBm (0.158 µV)	-120 dBm (0.224 µV)	-121.5 dBm (0.188 µV)	
Intermodulation Rejection (12.5 kHz / 25 kHz)	Pre-Amp 84 dB / 85 dB	Standard 86 dB / 96 dB	Pre-Amp 82 dB / 83 dB	Standard 86 dB / 86 dB	Pre-Amp 82 dB / 83 dB	Standard 86 dB / 86 dB	85 dB / 85 dB		85 dB / 85 dB	
Spurious Rejection	90 dB		90 dB		90 dB		100 dB		100 dB	
Audio Response ¹	+1, -3 dB (EIA)		+1, -3 dB (EIA)		+1, -3 dB (EIA)		+1, -3 dB (EIA)		+1, -3 dB (EIA)	
Audio Distortion at rated ¹	1.20%		1.20%		1.20%		1.20%		1.20%	
Selectivity ¹ (12.5 kHz / 25 kHz / 30 kHz)	76 dB 87 dB 90 dB		76 dB 82 dB -		76 dB 82 dB -		72 dB 82.5 dB -		72 dB 82.5 dB -	

POWER AND BATTERY DRAIN

	VHF	UHF R1	UHF R2	700 MHz	800 MHz
Frequency Range Band Splits	136-174 MHz	380-470 MHz	450-520 MHz	764-775, 794-806 MHz	806-825, 851-870 MHz
RF Power Output	1-50 W (mid-power) 1-100 W (high-power)	10-40 W (mid-power) 1-100 W (high-power)	1-45 W (450-485 MHz) 1-40 W (485-512 MHz) 1-25 W (512-520 MHz)	1-35 W	1-35 W
Operation	13.8 V DC ±20% Negative Ground	13.8 V DC ±20% Negative Ground	13.8 V DC ±20% Negative Ground	13.8 V DC ±20% Negative Ground	13.8 V DC ±20% Negative Ground
Standby at 13.8 V	1.4 A	1.4 A	1.4 A	1.4 A	1.4 A
Receive Current at Radio Audio at 13.8 V	3.2 A	3.2 A	3.2 A	3.2 A	3.2 A
Transmit Current at Rated Power (mid-power)	8 A @ 15 W 15 A @ 50W	8 A @ 15 W 15 A @ 40W	8 A @ 15 W 13 A @ 45W	8 A @ 15 W 15 A @ 50W	8 A @ 15 W 13 A @ 50W
Transmit Current at Rated Power (high-power)	8 A @ 15 W 30 A @ 40 W	8 A @ 15 W 30 A @ 45 W	-	-	-

LOCATION - TRACKING

Channels	12
Tracking Sensitivity	-164 dBm
Accuracy ²	<5 meters (95%)
Cold Start	<60 seconds (95%)
Hot Start	<5 seconds (95%)
Mode of Operation	Autonomous (Non-Assisted) GNSS or SBAS

FCC/IC TYPE ACCEPTANCE

FCC/IC ID	Band and Power Level
FCC ID: AZ492FT7089 IC ID: 109U-92FT7089	764-776 MHz (10-30 W)
	794-806 MHz (10-30 W)
	806-824 MHz (10-35 W)
	851-870 MHz (10-35 W)
	136-174 MHz (10-50 W)
	380-470 MHz (10-40 W)
	450-485 MHz (10-45 W)
	485-512 MHz (10-40 W)
	512-520 MHz (10-25 W)
	FCC ID: AZ492FT7118 IC: N/A
380-470 MHz (1-100 W)	

ENCRYPTION

Supported Encryption Algorithms	256-bit AES, ADP, DES, DES-XL, DES-OFB, DVP-XL
Encryption Algorithm Capacity	8
Encryption Keys per Radio	Module capable of storing 1024 keys. Programmable for 128 Common Key Reference (CKR) or 16 Physical Identifier (PID)
Encryption Frame Re-sync Interval	P25 CAI 300 mSec
Encryption Keying	Key Loader
Synchronization	XL – Counter Addressing OFB – Output Feedback
Vector Generator	National Institute of Standards and Technology (NIST) approved random number generator
Encryption Type	Digital
Key Storage	Tamper protected volatile or non-volatile memory
Key Erasure	Keyboard command and tamper detection
Standards	FIPS 140-2 Level 3, FIPS 197

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-30°C/+60°C
Storage Temperature	-40°C/+85°C
Humidity	Per MIL-STD
ESD	IEC 801-2 KV
Water & Dust Intrusion	IP56

¹ Measured in the analog mode per TIA / EIA 603 single-tone method under nominal conditions
² Measured conductivity with >6 satellites visible at a nominal -130 dBm signal strength.





MOBILE MILITARY STANDARDS 810, C, D, E, F & G

	MIL-STD 810C		MIL-STD 810D		MIL-STD 810E		MIL-STD 810F		MIL-STD 810G	
	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.
Low Pressure	500.1	I	500.2	II	500.3	II	500.4	I/II	500.5	II
High Temperature	501.1	I, II	501.2	I/A1, II/A1	501.3	I/A1, II/A1	501.4	I/Hot, II/Hot	501.5	I/A1, II/A1
Low Temperature	502.1	I	502.2	I/C3, II/C1	502.3	I/C3, II/C1	502.4	I/C3, II/C1	502.5	I/C3, II/C1
Temperature Shock	503.1	I Proc	503.2	1/A1C3	503.3	1/A1C3	503.4	I	503.5	I/C
Solar Radiation	505.1	II	505.2	I	505.3	I	505.4	I	505.5	I/A1
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, III	506.5	I, III
Humidity	507.1	II	507.2	II	507.3	II	507.4	I Proc	507.5	II/Aggravated
Salt Fog	509.1	I Proc	509.2	I Proc	509.3	I Proc	509.4	I Proc	509.5	I Proc
Blowing Dust	510.1	I	510.2	I, II	510.3	I, II	510.4	I, II	510.5	I, II
Vibration	514.2	VIII/F, Curve-W	514.3	I/10, II/3	514.4	I/10, II/3	514.5	I/24	514.6	I/24
Shock	516.2	I, III, V	516.3	I, V, VI	516.4	I, V, VI	516.5	I, V, VI	516.6	I, V, VI

For more information, please visit us on the web at: www.motorolasolutions.com/APX



Motorola Solutions, Inc. 500 West Monroe Street, Chicago, IL 60661 U.S.A. motorolasolutions.com

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 2020 Motorola Solutions, Inc. All rights reserved. 05-2020